





Reinventing Spaces






The LOOM+ DESIGN PLAY WITH COLOR, SIZE,

and TEXTURE

Profound Color Composition

Realizing multiple tones of color - carefully selected by artists – we provide you with very unique colors that expresses LOOM+ in harmony with surrounding interiors.




Infinite array of color and texture

Available in 47 colors covering diverse tones like neutral, cool, warm, light, and dark in four different yarn thicknesses, we give you seven unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to seven design patterns.



Optimal 2 Size variation

With our unique 2 module sizes of 50cm x 50cm and 50cm x 100cm, the first introduced in woven flooring market, you can elevate the flat environments to inspiring interior spaces.



50x50cm Standard size




100x50cm Double size

The LOOM + TECHNOLOGY Proven Innovation

Distinguished NOX Ecotecture® Multi-layer Property

NOXEcotecture® Multi-layerProperty featured with innovative functionality and safety, proven in more than 50 countries over 20 years

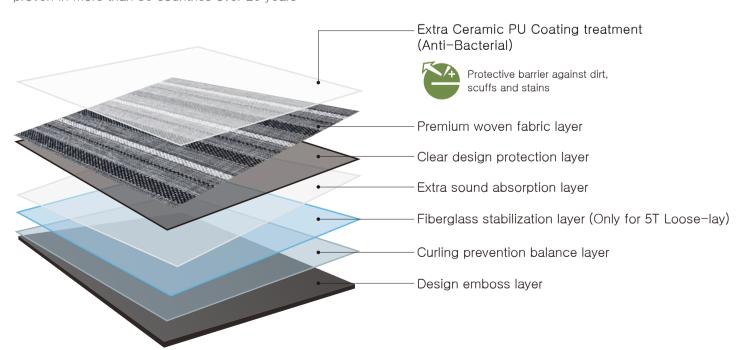



Safe

Certified non-toxic, phthalate-free, and fiberglass-free fabric



Clear

Xtreme CLEANguard PU Coating treatment applied to resist stain by not absorbing liquids and thus making spills quick and easy to clean



Tough

Approved for heavy commerical use



Quick

Quick and EasyECOLAY® installation without glue



Easv

Minimal cleaning time and low maintenance



Silent & Soft

Soft surface absorbing sound



Consistent thickness

Consistent product thickness by patterns and size for mixing and matching different patterns



Fray-proof

Clean-cut finishing for preventing fraying




Non-Slip

Slip-resistance with woven fabric surface



Colorfast

Colorfast properties retain gorgeous original colors over time

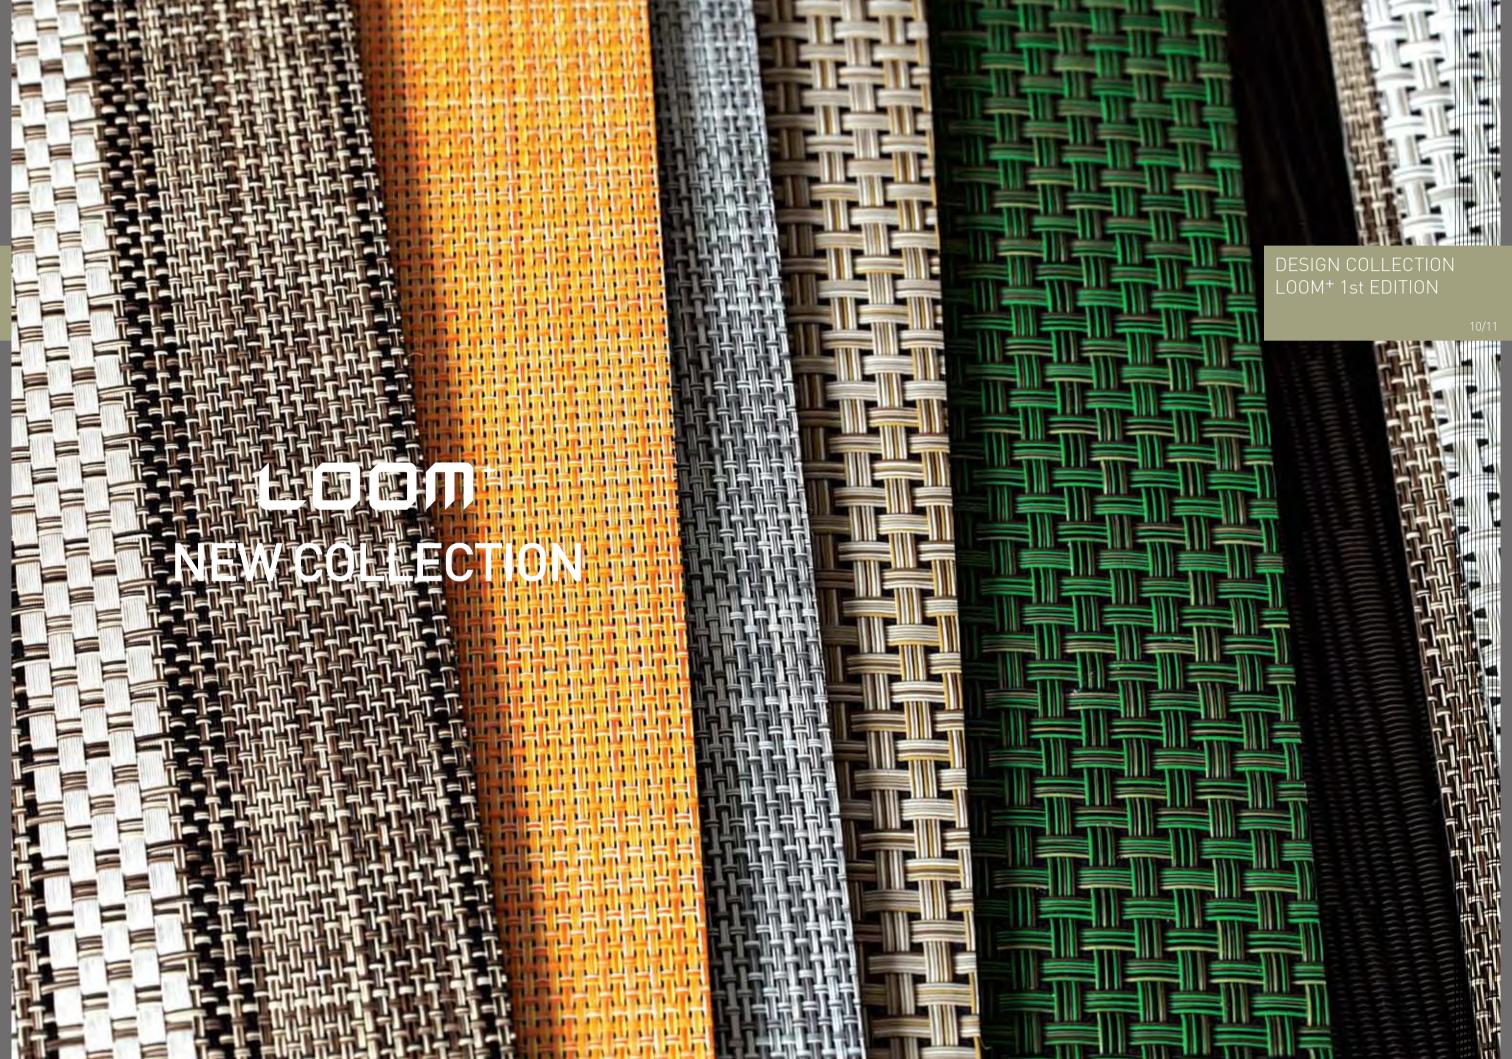



Stylish & Decorative

Mix & match installation with knit and hand-stitch lines provides diverse floor designs. Sophisticated weaving structure coming in different thicknesses realizes never-seen before innovative floor textures.







FR-2103




FR-210



FR-2105



FR-2106

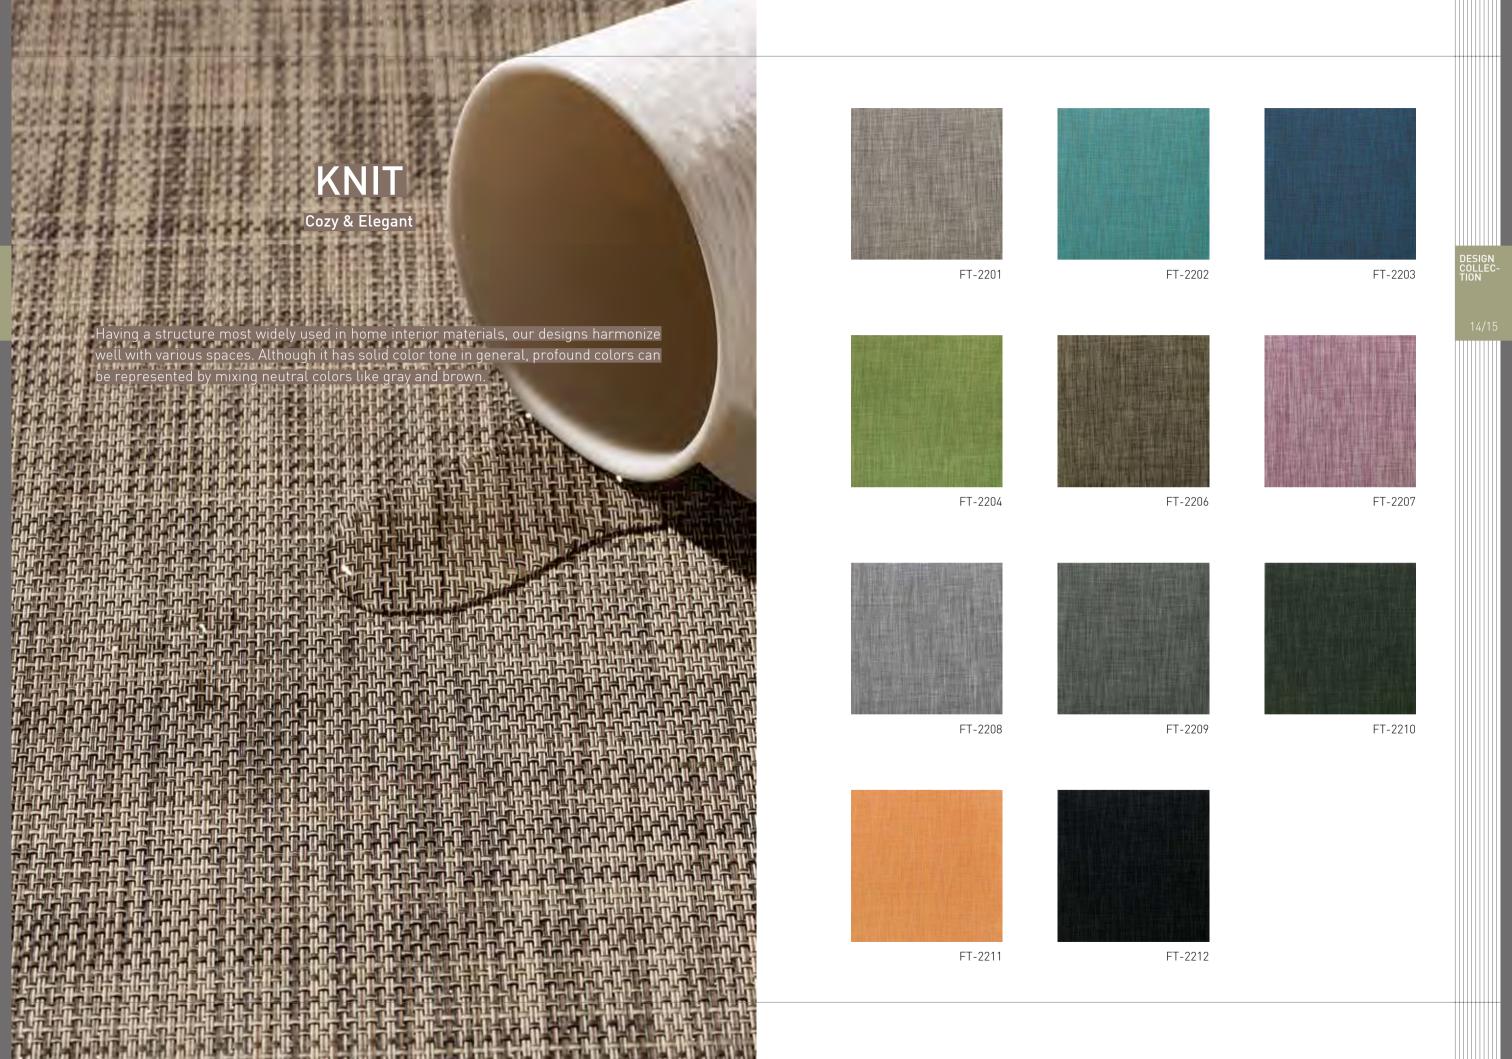

PIN-STRIPE

Modern & Retro-pop

Now with modern sensitivity, retro-pop mood and unique colors enable unique one-of-a-kind point design in commercial spaces







FR-2301

FR-2302

ED 22






FR-2306

FR-2308

ESIGN OLLEC-ION

16/17

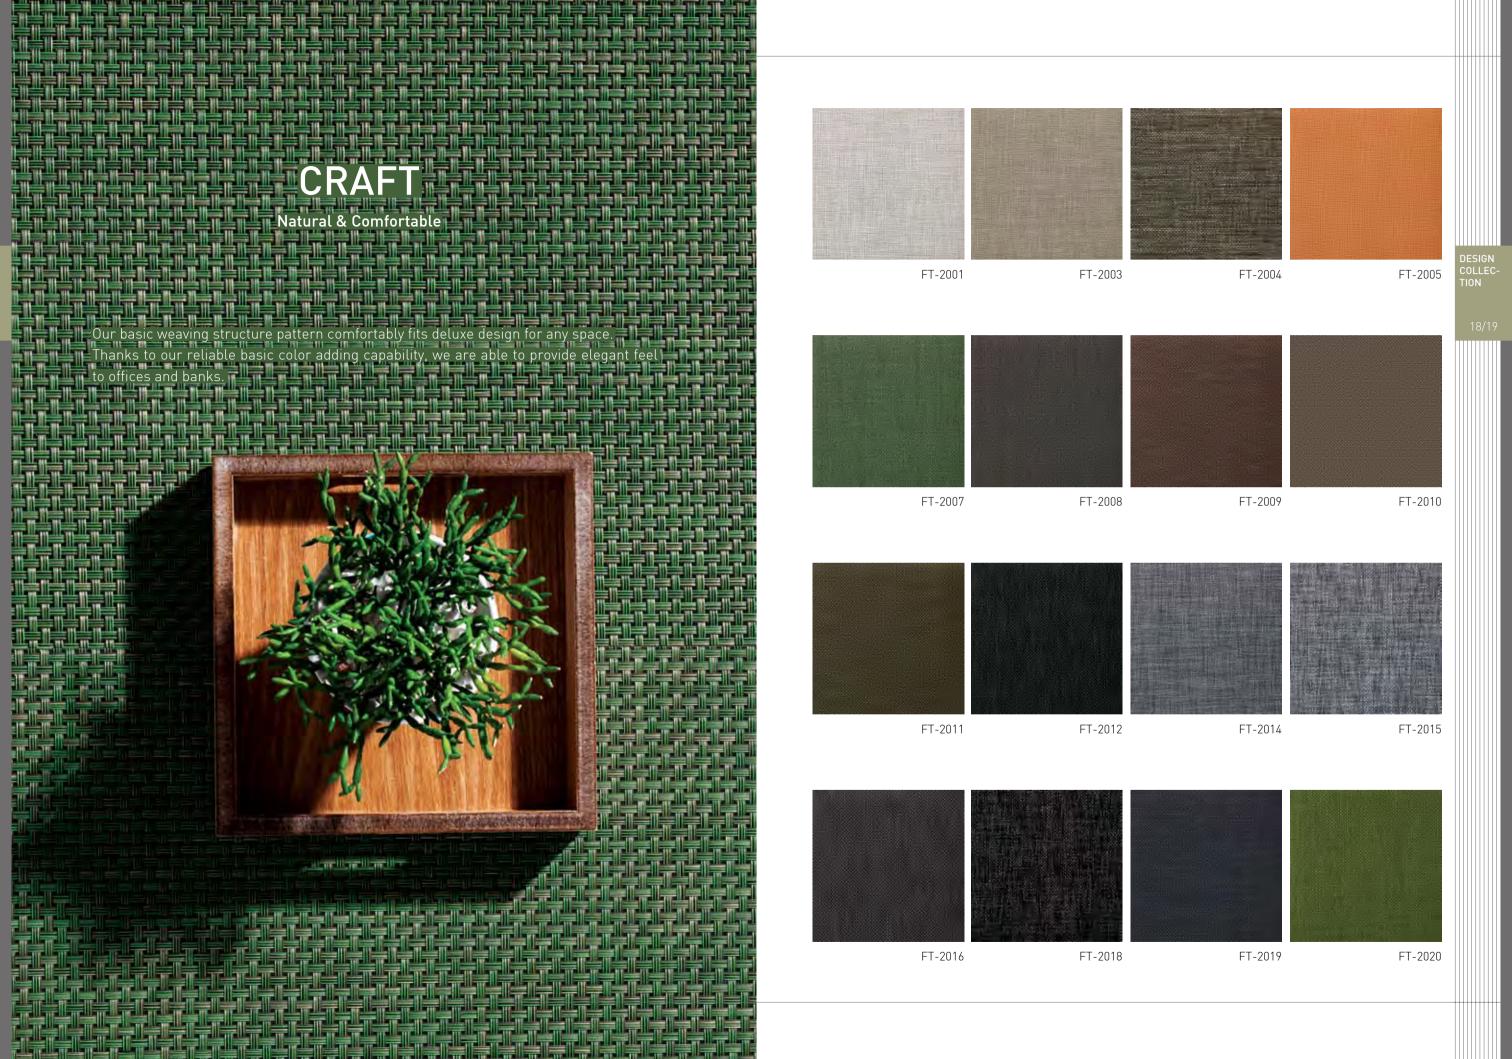



Cosmopolitan Style

It has a structure enabling modern design in various spaces. Brown colors covering from neutral and dark tones provide high-end ambiance to commercial spaces and offices.







FT-1204

FT-1205


FT-1206






FT-1208

FT-1209

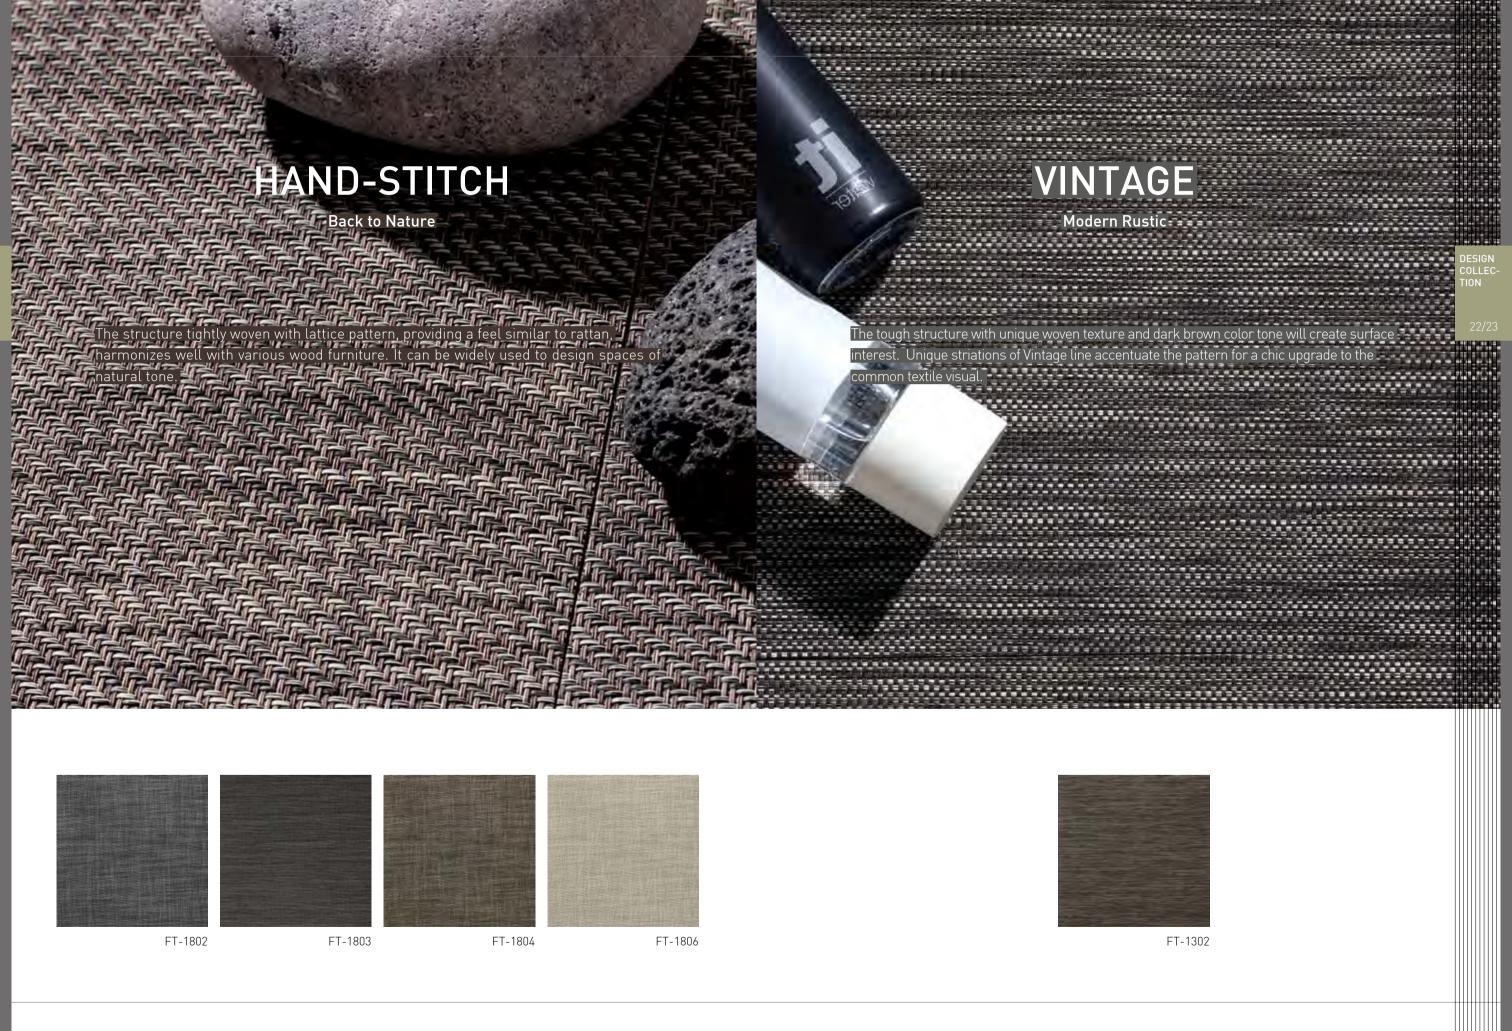

LOOM* CONCEPT GUIDE

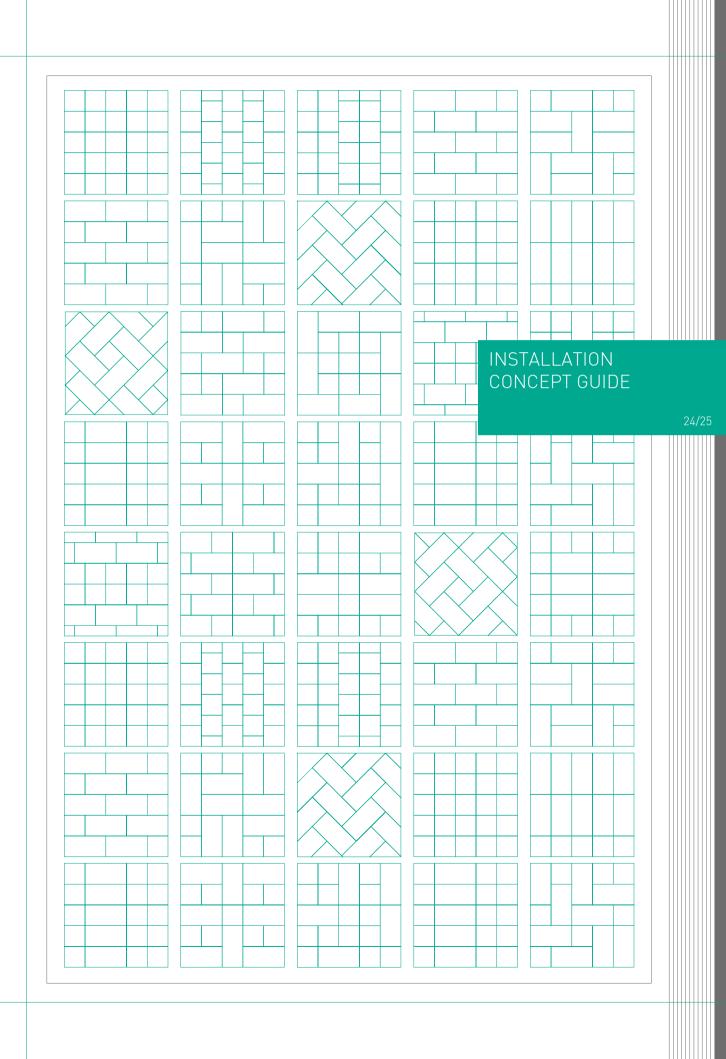

LOOM* PLAY!


Your flat environments will become more stylish with unlimited design options of LOOM+.

Why don't you enjoy creating your own design by mixing & matching different patterns and colors in 2 size variations?






LOOM* PLAY ONE





LOOM PLAY #1

LOOM PLAY #5



LOOM PLAY #2






LOOM PLAY #3

LOOM PLAY #6




LOOM PLAY #7




LOOM PLAY #8

LOOM PLAY #4


LOOM* PLAY TWO




LOOM PLAY #9




LOOM PLAY #10




LOOM PLAY #11




LOOM PLAY #12




LOOM PLAY #13




LOOM PLAY #14




LOOM PLAY #15




LOOM PLAY #16




LOOM PLAY #17



LOOM PLAY #18




LOOM PLAY #19





LOOM PLAY #20

INSTAL-LATION CON-CEPT GUIDE

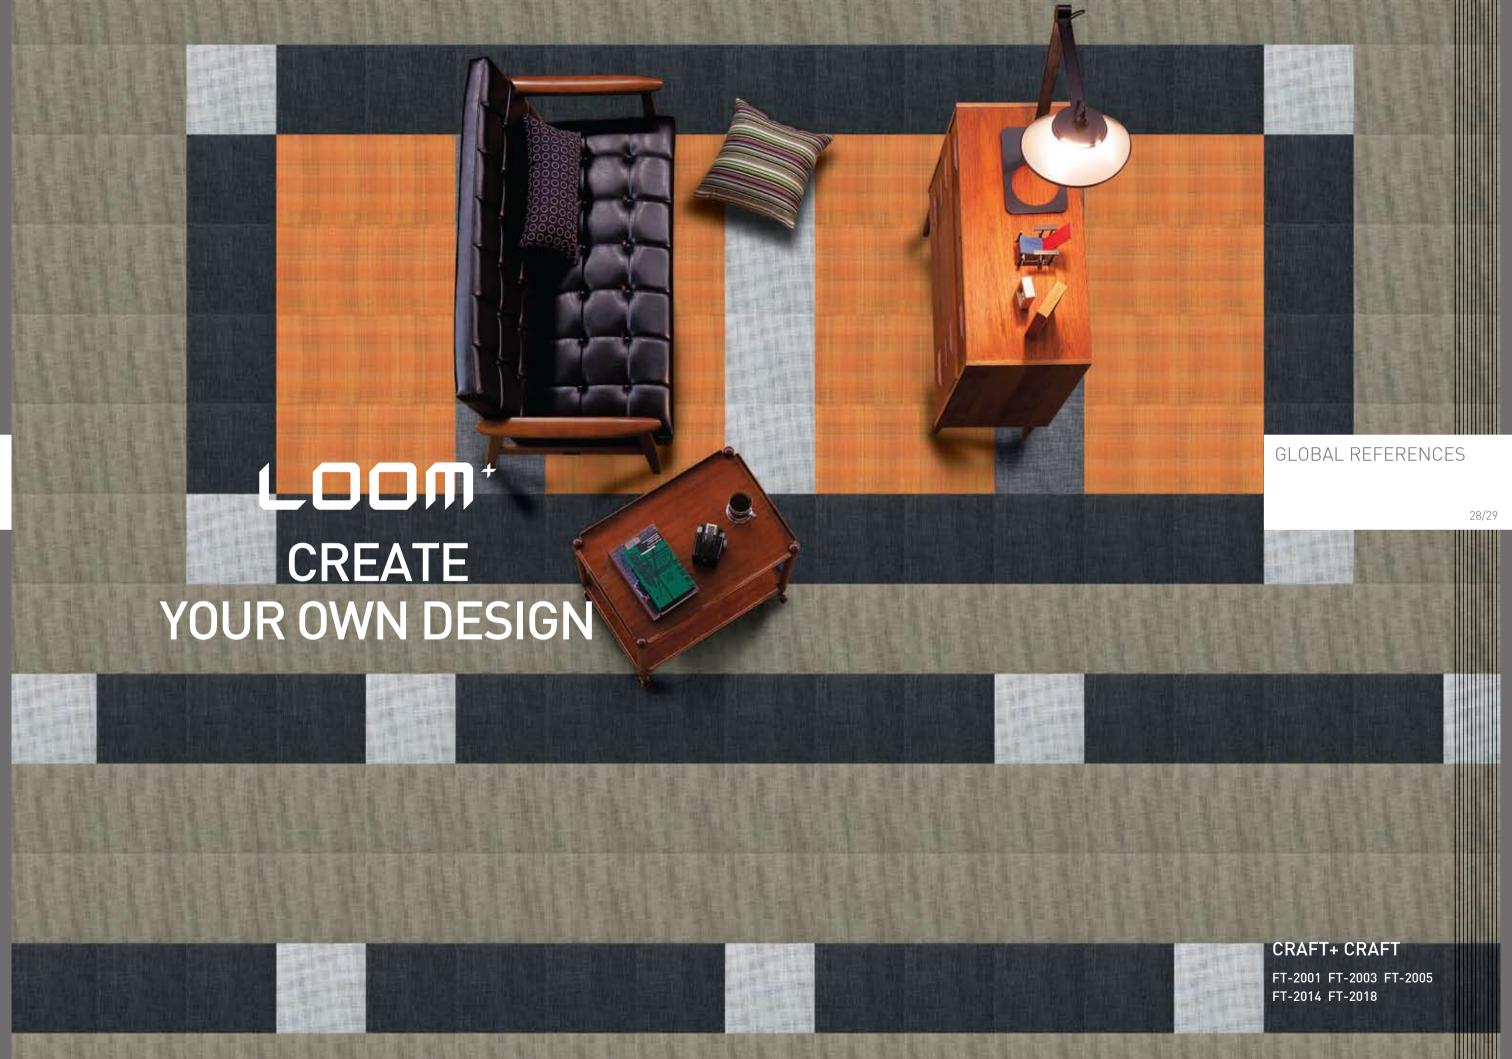


Art Gallery & Museum Restaurant

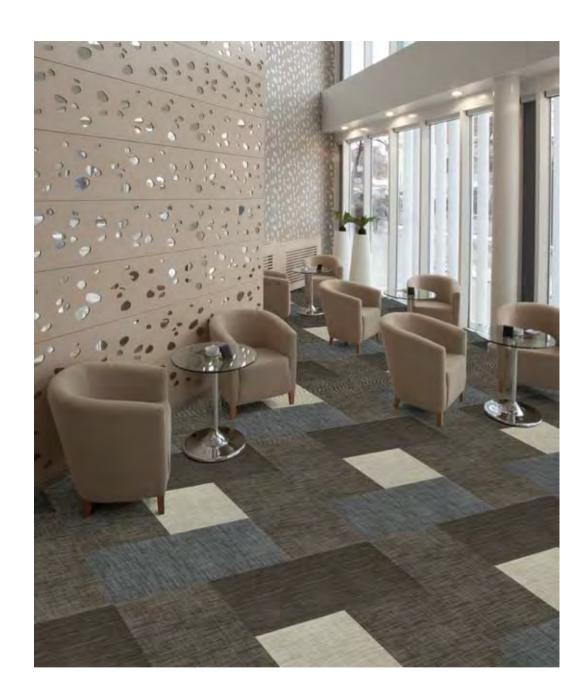

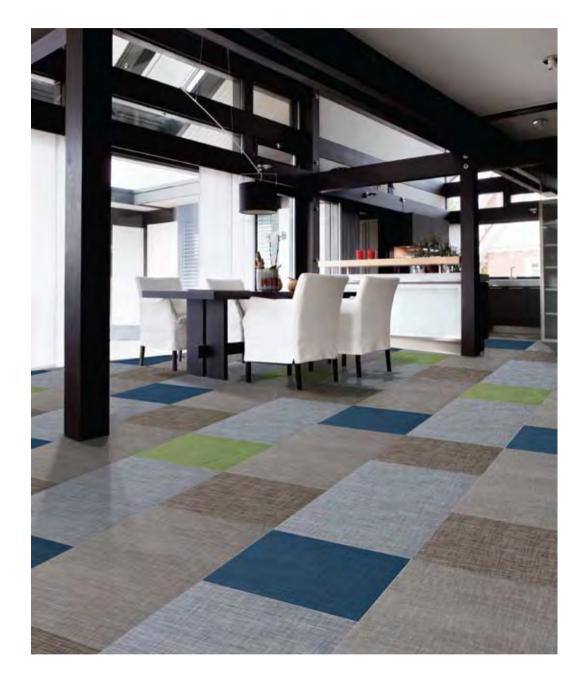

HAND STITCH + HAND STITCH

FT-1802 FT-1803 FT-1804 FT-1806



LOOM PLAY #9

KNIT+ KNIT

FT-2201 FT-2203 FT-2204 FT-2206 FT-2208

\rightarrow	\rightarrow	\rightarrow		\rightarrow
\rightarrow		\rightarrow	\rightarrow	
\rightarrow	_	\rightarrow	\rightarrow	\rightarrow
\rightarrow	\rightarrow	_	\rightarrow	\rightarrow
	\rightarrow	\rightarrow \rightarrow		\rightarrow

LOOM PLAY #10

GLOBAL REFER-ENCES

30/31





GLOBAL REFER-ENCES

32/33

CRAFT+ CRAFT

FT-2001 FT-2004 FT-2011 FT-2018




CORD + CORD

FT-1205 FT-1206 FT-1208

\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow

LOOM PLAY #1

Airport

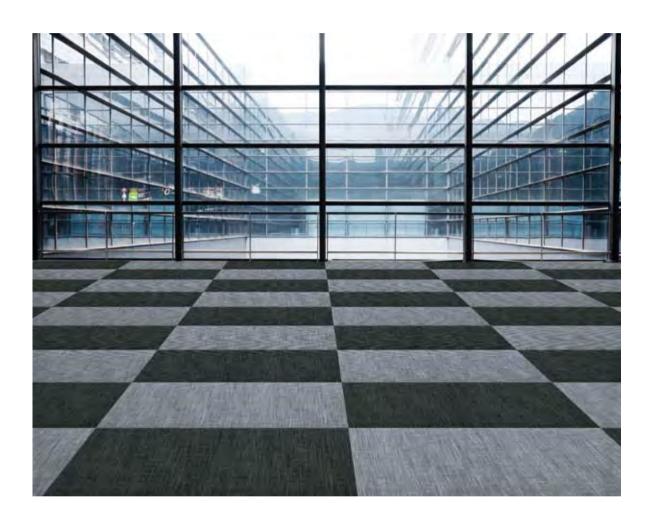



GLOBAL REFER-ENCES

34/35

KNIT+ KNIT

FT-2208 FT-2212

\downarrow	\downarrow	\downarrow	\rightarrow	\downarrow
\downarrow	\downarrow	\downarrow	\rightarrow	\downarrow
\downarrow	\downarrow	\downarrow	\downarrow	\downarrow

LOOM PLAY #8


PIN STRIPE + CRAFT


PIN STRIPE FR-2301 CRAFT FT-2014

\uparrow	\uparrow	\uparrow	\uparrow	\uparrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\uparrow	\uparrow	\rightarrow	\uparrow	\uparrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\uparrow	\uparrow	\uparrow	\uparrow	\uparrow

LOOM PLAY #1

Hospitality & Health Care Education & Libraries

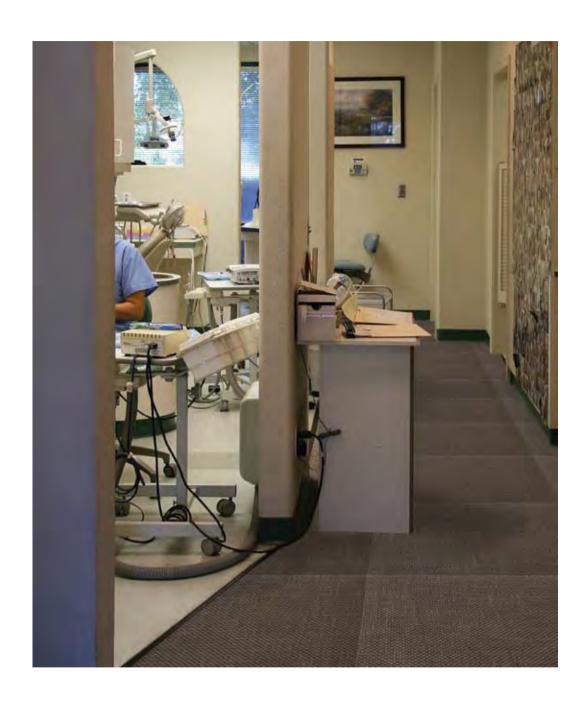

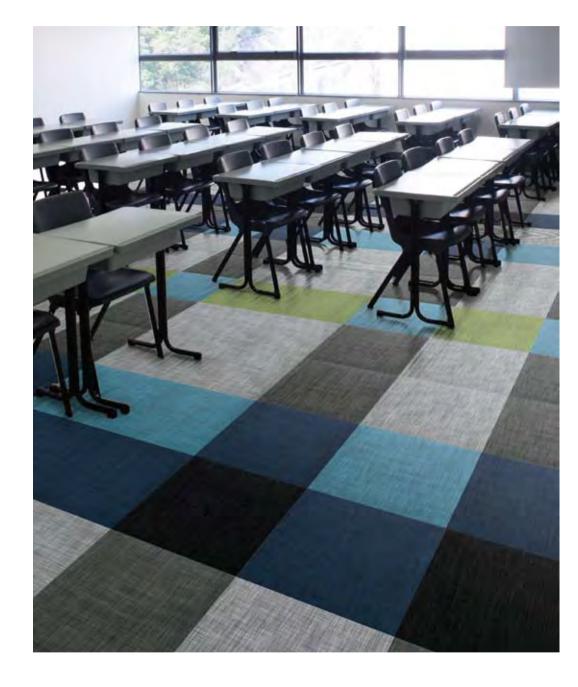

CRAFT

FT-2011

\uparrow	\uparrow	\uparrow	\uparrow	\uparrow
\uparrow	\uparrow	\uparrow	\uparrow	\uparrow
\uparrow	\uparrow	\uparrow	\uparrow	\uparrow
\uparrow	\uparrow	\uparrow	\uparrow	\uparrow
\uparrow	\uparrow	\uparrow	\uparrow	\uparrow

LOOM PLAY #1

KNIT+ KNIT


FT-2202 FT-2203 FT-2204 FT-2208 FT-2209 FT-2212

\rightarrow	\rightarrow	\rightarrow	\rightarrow	
\rightarrow	\rightarrow	\rightarrow	\rightarrow	
\rightarrow	\rightarrow	\rightarrow	\rightarrow	
\rightarrow	\rightarrow	\rightarrow	\rightarrow	
\rightarrow	\rightarrow	\rightarrow	\rightarrow	

LOOM PLAY #13

GLOBAL REFER-ENCES

36/37

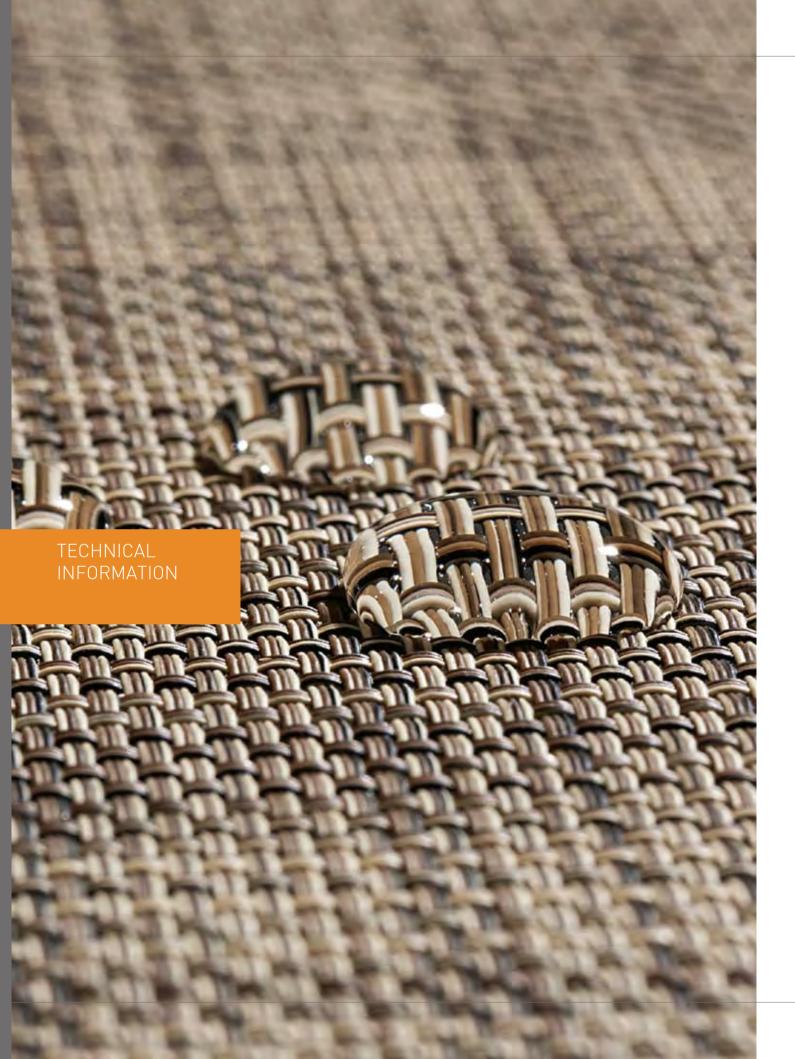

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m²/Box	Kg/m²
500x500	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	2.5 m ²	8.2
1000x500	3	8 pcs/box	4 m²	5.0
	5	5 pcs/box	$2.5\mathrm{m}^2$	8.2

2. Test Result

Test Item	Standard	L00M ⁺
Level of use	EN 685	33
Fraying	EN 1814	Frayproof
Thermal resistance	ISO 8302	0.02m ² K/W
Castor chair resistance	EN 985	No damage
Dimensional stability	ISO 23999 / EN 434 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	EN 13501	Bfl -s1
Formaldehyde group	EN 717-1	E1
Indoor air quality		Low VOC
Underfloor heating	EN 12524	Suitable
Light fastness	ISO 105-B02	≥ 6
Slip resistance	DIN 51130 EN 13893	R10 DS
Flexibility	ISO 24344	Passed
Impact sound insulation	ISO 10140-3	9dB
Body Voltage	EN 1815	< 2kV
Squareness & Straightness	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation	EN 433 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals	ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 18°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate

















Visit www.loomplus.com for the detailed installation / maintenance guides and technical information.



Designed and Manufactured by NOX Corporation

Corporate Office

Yoonil Bldg, 5F 336 Hyoryeong-ro Seocho-Gu, 137-865, Seoul, Korea Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxprime.com E-mail info@noxprime.com

Production Facilities

Godeok Factory Bongsan Factory Deoksan Factory Choongnam, Korea

Reinventing Spaces



WOVEN DESIGN FLOORING

Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Kore Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxglobal.com E-mail info@noxglobal.com

NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedan
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Choongnam Korea

NOX US | USA


NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830 Office +01-419-701-5060 Fax +01-419-701-5058

HERRINGBONE

Classic & Cozy





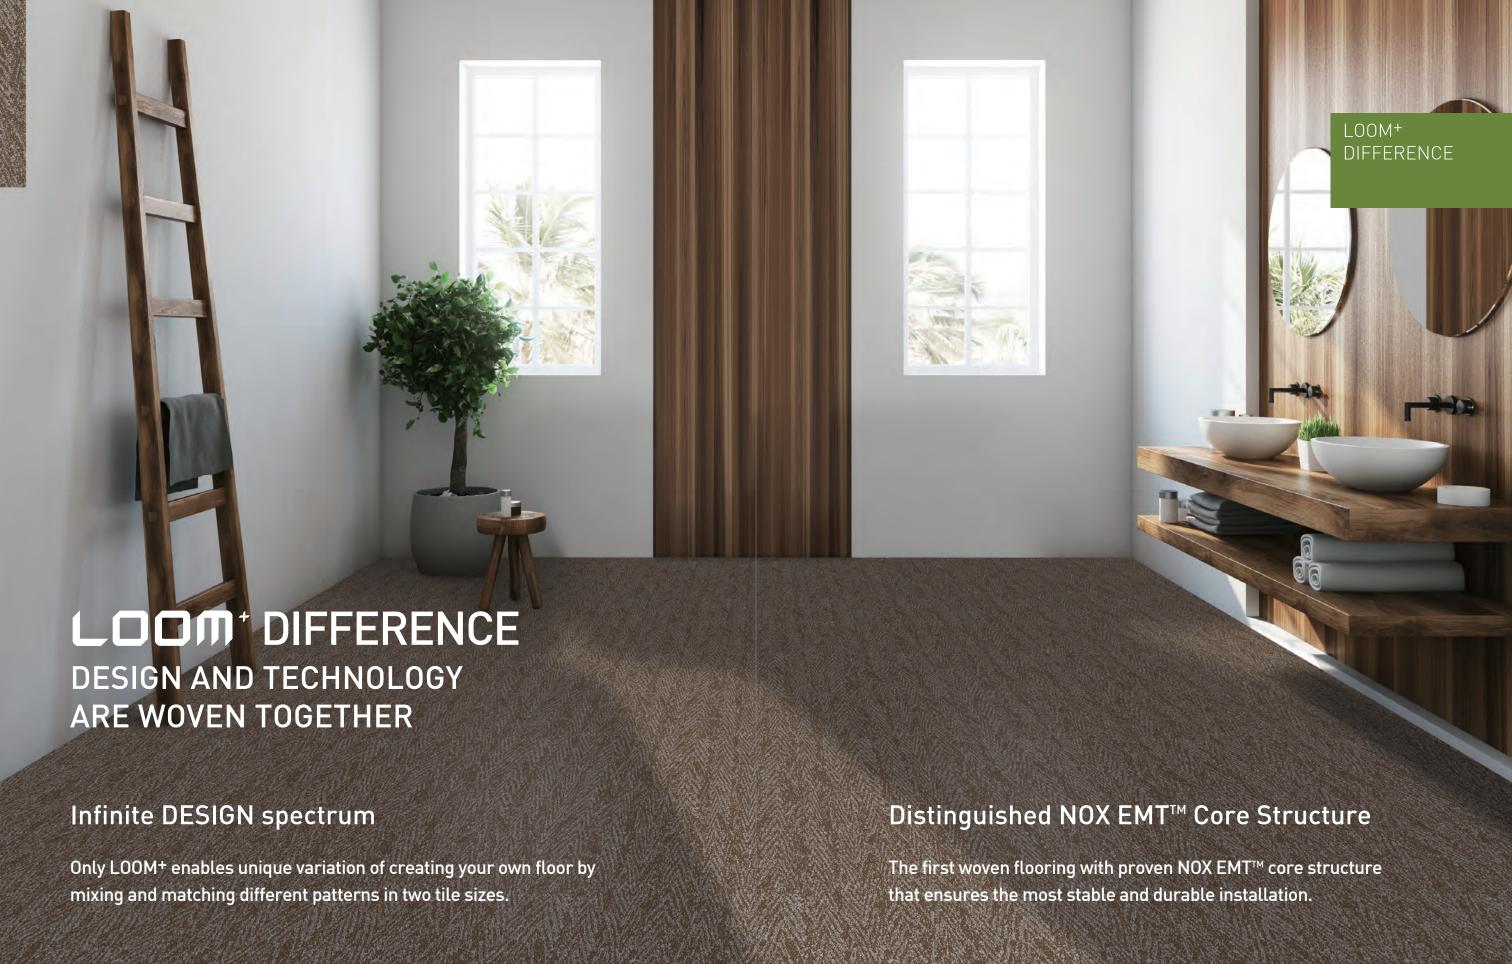

LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound Color Composition

Realizing multiple tones of color - carefully selected by artists - we provide you with very unique colors that expresses LOOM+ in harmony with surrounding interiors.



Infinite array of color and texture

Available in 59 colors covering diverse tones like neutral, cool, warm, light, and dark in five different yarn thicknesses, we give you nine unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to nine design patterns.



50x50cm 25x100cm

Standard size Plank size

Optimal 2 Size variation

With our unique 2 module sizes of 50cm×50cm and 25cmx100cm, the first introduced in woven flooring market, you can elevate the flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT[™] Core Structure

NOX EMT[™] core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years

- Clean & Tough





- + The first & only in woven flooring with NOX EPT™ shield treatment (Anti-Bacterial)
- + Strong enough for heavy commercial use



Dimensional Stability & Consistent Thickness







- + The most reliable NOX EMT™ core structure + Consistent product thickness by patterns for
- mix & match with different patterns

+ Clean-cut finishing for preventing fraying even when cutting tiles during installation



Children & Schools

IREENGUARD®

Indexer Air Quality Certified

Safe

Certified non-toxic, phthalate-free. and fiberglass-free



Quick

Quick and Easy ECOLAY® installation without glue





Minimal cleaning time and low maintenance




Colorfast

Non-Slip

Slip-resistance

Colorfast properties retain gorgeous original colors over time

with woven fabric surface






Silent & Soft Soft surface absorbing





FQ-2501



FQ-2502



FQ-2503



FQ-2504



FQ-2505



FQ-2506

08 / 09

Reinvent Spaces with

PLAY!


New 25cmx100cm MIXMATCH plank brings new proportion and scale to your flooring to create fresh and exciting designs. In addition to new MIXMATCH plank, LOOM+ modular system includes 50cmx50cm squares.

All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.





NEW LOOM* PLAY!




LOOM PLAY #21



LOOM PLAY #26




LOOM PLAY #22



LOOM PLAY #27






LOOM PLAY #28



LOOM PLAY #24




LOOM PLAY #29



LOOM PLAY #25

LOOM PLAY #30


INSTALLATION CONCEPT GUIDE

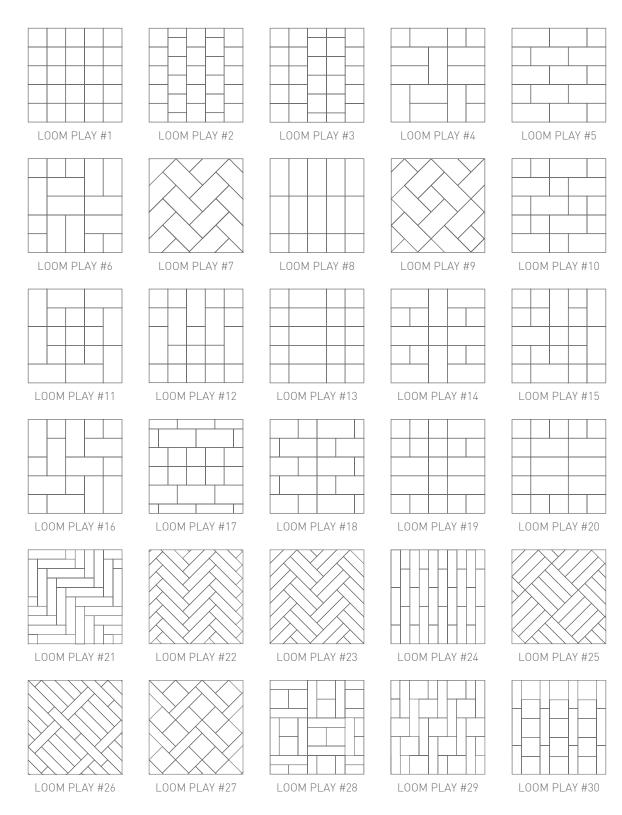



12 / 13

Restaurant Corporate

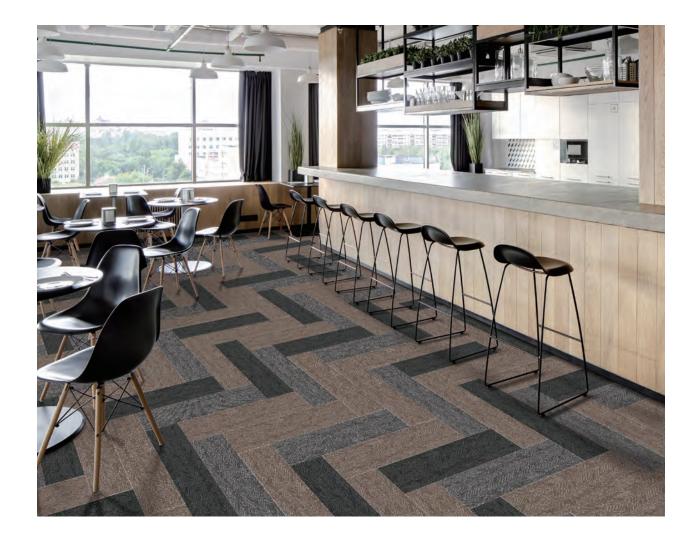











Hospitality




Retail shop



FQ-2503







LOOM PLAY #24

Education & Libraries Healthcare



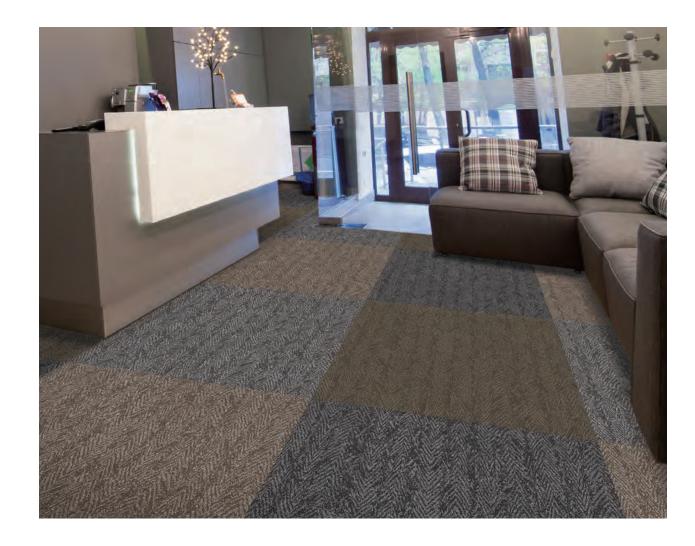







FQ-2502 FQ-2503 FQ-2504 FQ-2505

Sports Center

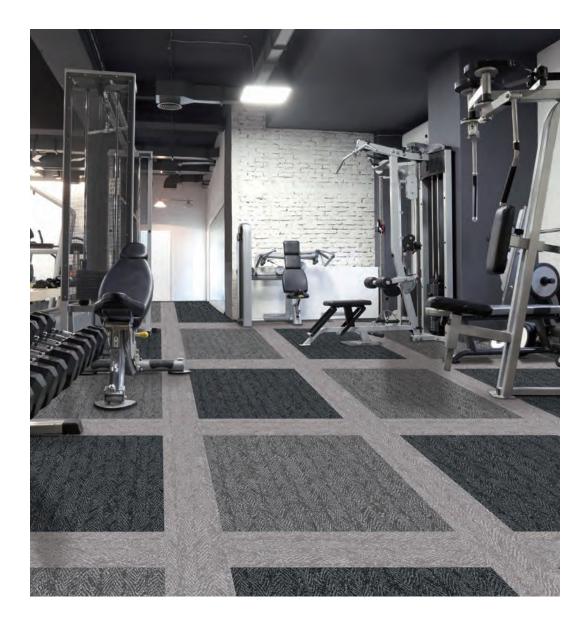



LOOM PLAY #26

FQ-2501 FQ-2502 FQ-2505

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m²/Box	Kg/m²
500x500	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	$2.5\mathrm{m}^2$	8.2
250x1000	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	$2.5\mathrm{m}^2$	8.2

2. Test Result

Test Item		Standard	LOOM+
Level of use		EN 685	33
Fraying	8	EN 1814	Frayproof
Thermal resistance		ISO 8302	0.02m ² K/W
Castor chair resistance		EN 985	No damage
Dimensional stability	K 71 <u>L \(\(\)</u>	ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	B _H -s1	EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness	7	ISO 105-B02	≥ 6
Slip resistance	TO DE	DIN 51130 EN 13893	R11 DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness	7	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion.

NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate



















Visit www.loomplus.com for the detailed installation / maintenance guides and technical information.

Reinventing Spaces

WOVEN DESIGN FLOORING

Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Kore; Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxglobal.com E-mail info@noxglobal.com


NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedan
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Choongnam Korea

NOX US | USA

NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830 Office +01-419-701-5060 Fax +01-419-701-5058

OMBREInspirational & Unique

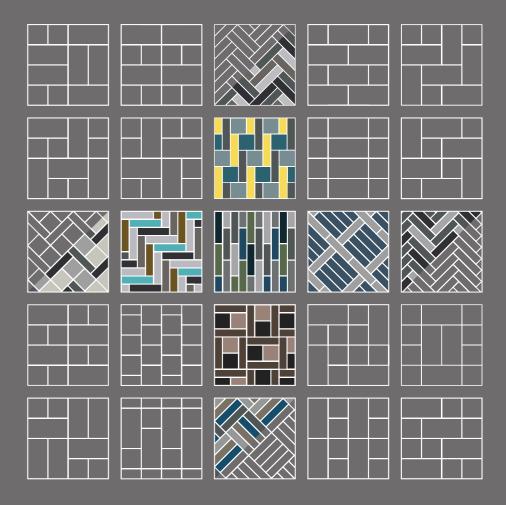






LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound Color Composition

Realizing multiple tones of color - carefully selected by artists - we provide you with very unique colors that expresses LOOM+ in harmony with surrounding interiors.



Infinite array of color and texture

Available in 59 colors covering diverse tones like neutral, cool, warm, light, and dark in five different yarn thicknesses, we give you nine unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to nine design patterns.



50x50cm 25x100cm Standard size Plank size

Optimal 2 Size variation

With our unique 2 module sizes of 50cm×50cm and 25cmx100cm, the first introduced in woven flooring market, you can elevate the flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT[™] Core Structure

NOX EMT[™] core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years

- Clean & Tough





- ★ The first & only in woven flooring with NOX EPT™ shield treatment (Anti-Bacterial)
- + Strong enough for heavy commercial use



Dimensional Stability & Consistent Thickness







- + The most reliable NOX EMT™ core structure
- + Consistent product thickness by patterns for mix & match with different patterns

+ Clean-cut finishing for preventing fraying even when cutting tiles during installation



Children & Schools

REENGUARD*

Indicate Air Quality Correlated

Safe Certified non-toxic, phthalate-free. and fiberglass-free



Quick Quick and Easy ECOLAY®



Non-Slip Slip-resistance

installation without glue with woven fabric surface



Easy Minimal cleaning time

and low maintenance



Silent & Soft Soft surface absorbing




Colorfast Colorfast properties retain gorgeous original colors over time



NOX Ombre collection offers a unique linear pattern, rich texture and beautiful accent tones available in 6 sophisticated colors in our new 25cmx100cm plank.

Designed to capture its audience with expanding and contracting rhythms.



FQ-2401



FQ-2402



FQ-2403



FQ-2404



FQ-2405



FQ-2406

08 / 09

Reinvent Spaces with

PLAY!


New 25cmx100cm MIXMATCH plank brings new proportion and scale to your flooring to create fresh and exciting designs. In addition to new MIXMATCH plank, LOOM+ modular system includes 50cmx50cm squares.

All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.






NEW LOOM* PLAY!




LOOM PLAY #21




LOOM PLAY #26




LOOM PLAY #22




LOOM PLAY #27




LOOM PLAY #23




LOOM PLAY #28



LOOM PLAY #24




LOOM PLAY #29




LOOM PLAY #25


LOOM PLAY #30

INSTALLATION CONCEPT GUIDE

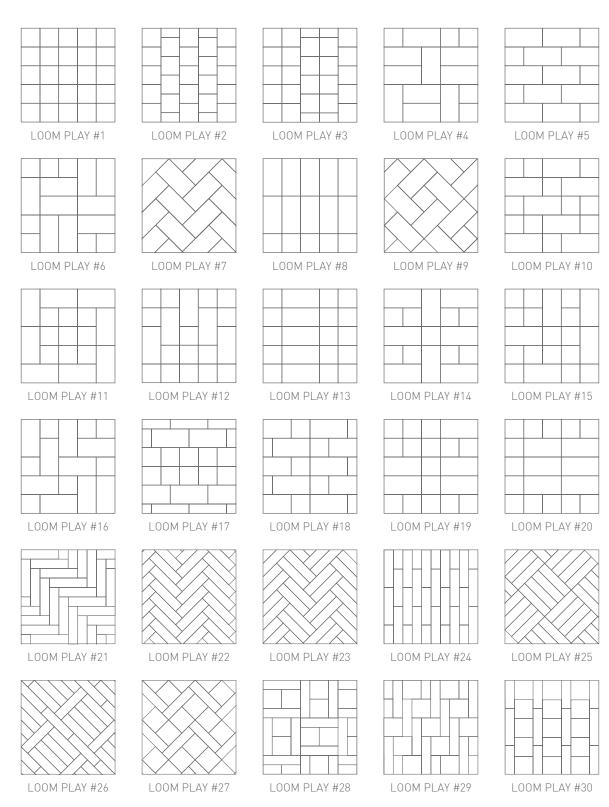

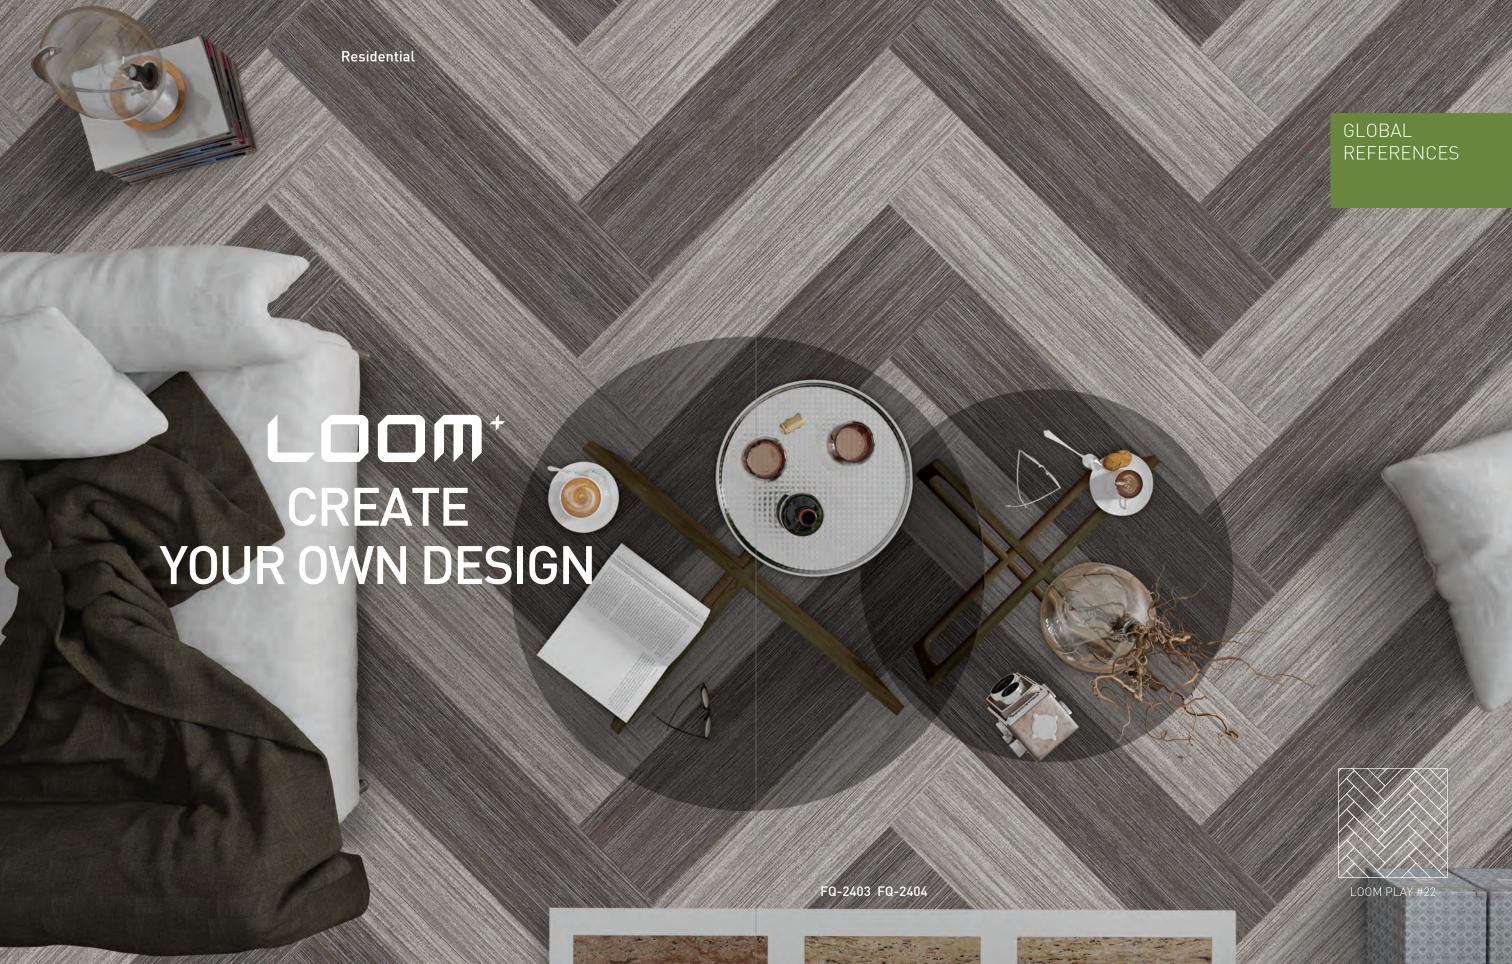



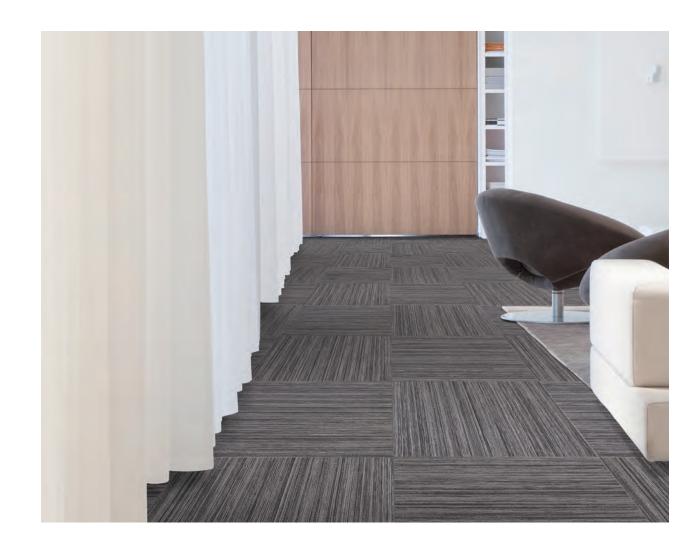



FQ-2401 FQ-2402 FQ-2403 FQ-2404 FQ-2405 FQ-2406

FQ-2401

\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow
\uparrow	\rightarrow	\uparrow	\rightarrow	\uparrow
\rightarrow	\uparrow	\rightarrow	\uparrow	\rightarrow


Retail shop






Hospitality






FQ-2403

Education & Libraries Restaurant

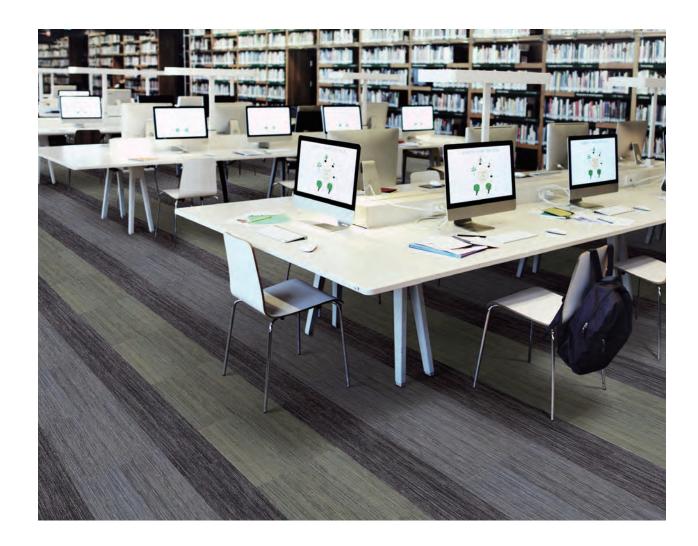











Hospitality





FQ-2401 FQ-2402 FQ-2404

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m²/Box	Kg/m²
500x500	3	16 pcs/box	$4\mathrm{m}^2$	5.0
	5	10 pcs/box	2.5 m ²	8.2
250x1000	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	$2.5\mathrm{m}^2$	8.2

2. Test Result

Test Item		Standard	L00M ⁺
Level of use		EN 685	33
Fraying		EN 1814	Frayproof
Thermal resistance		ISO 8302	0.02m²K/W
Castor chair resistance		EN 985	No damage
Dimensional stability	K Z	ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	B _{H-S} 1	EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness	7	ISO 105-B02	≥ 6
Slip resistance	T. DS	DIN 51130 EN 13893	R11 DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness	7	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion.

NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate




















Visit www.loomplus.com for the detailed installation / maintenance guides and technical information.

MÉLANGESimple & Sophisticated

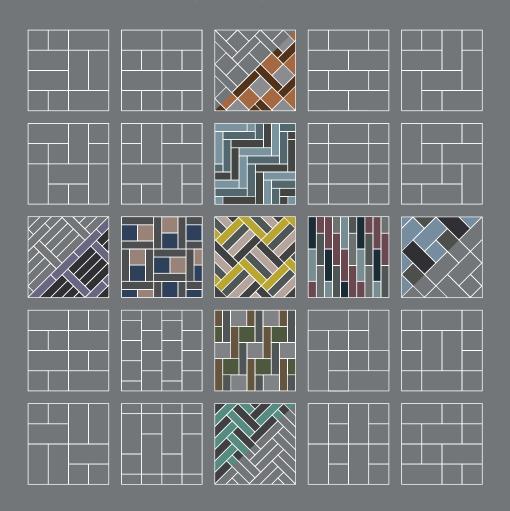





LOOM* DIFFERENCE DESIGN AND TECHNOLOGY ARE WOVEN TOGETHER

Better Floor

The tangible textile feeling of Mélange collection closely resembles the original material while exhibiting far superior qualities



LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound Color Composition

Realizing multiple tones of color - carefully selected by artists – we provide you with very unique colors that express LOOM+ in harmony with surrounding interiors.



Infinite array of color and texture

Available in myriad colors covering diverse tones like neutral, cool, warm, light and dark tones, we give you unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to various design patterns.



50x50cm Tile size



25x100cm Plank size

Optimal 2 Size variation

With our unique 2 module sizes of 50cm×50cm and 25cm×100cm, the first introduced in woven flooring market, you can elevate flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT™ Core Structure

NOX EMT[™] Core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years





- Clean & Hygienic (Anti-Microbial)

- + The first & only in woven flooring with NOX EPT™
 Shield treatment (Anti-Bacterial and Anti-Fungal coating system validated by UL)
- + Strong enough for heavy commercial use



Dimensional Stability & Consistent Thickness





★ Consistent product thickness by patterns for mix & match with different patterns





 Clean-cut finishing for preventing fraying even when cutting tiles during installation



Safe

Certified non-toxic, phthalate-free, and fiberglass-free fabric



EASY

Quick

Quick and easy loose lay® installation without glue



Non-Slip

Slip-resistance with woven fabric surface



Easy

Minimal cleaning time and low maintenance



Colorfast

Colorfast properties retain gorgeous original colors over time





Silent & Soft

Soft surface absorbing sound



NOX Mélange collection offers a true extent of nature's tree bark or dry soil. This softly rich pattern is a disordered mixture of similar shades, maximizing LOOM* mix & match possibilities in well-matched and diversified color blends.

> Enrich your space with LOOM+ Mélange, an earthy collection that adds a simple yet ultimate essence of sophistication.


06/07



FQ-2601



FQ-2602



FQ-2603



FQ-2604



FQ-2605



FQ-2606

Reinvent Spaces with

LOOM* PLAY!

All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.






50x50cm

25x100cm

NEW **LOOM**[↑] PLAY!




LOOM PLAY #21




LOOM PLAY #26




LOOM PLAY #22




LOOM PLAY #27




LOOM PLAY #23




LOOM PLAY #28




LOOM PLAY #24



LOOM PLAY #29




LOOM PLAY #25



LOOM PLAY #30


INSTALLATION CONCEPT GUIDE

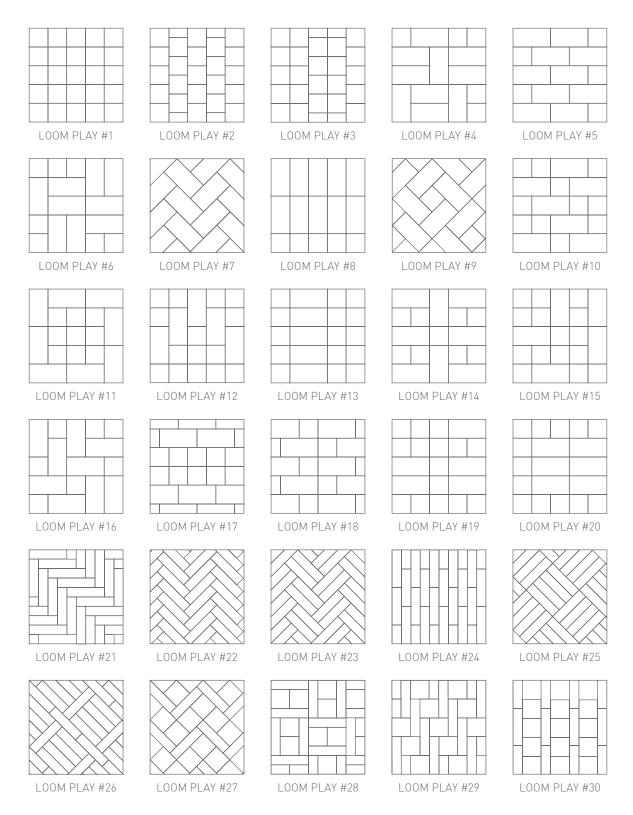


LOCT CREATE YOUR OWN DESIGN



Restaurant

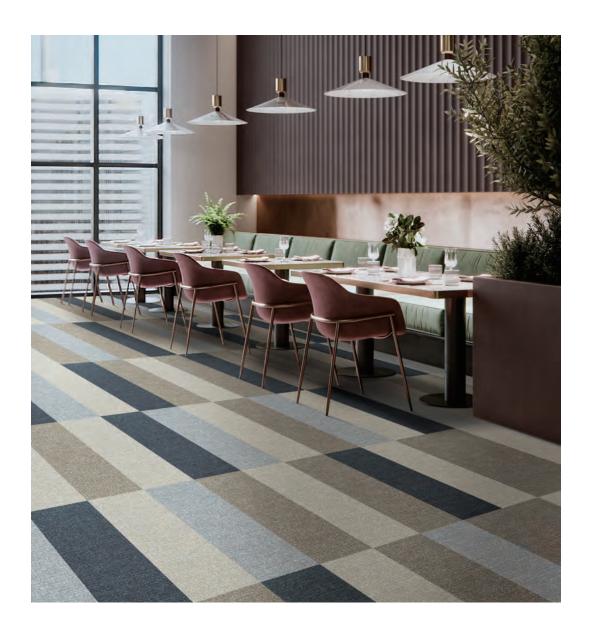




LOOM PLAY #08

FQ-2601 FQ-2603 FQ-2604 FQ-2606

Hospitality






LOOM PLAY #24

Retail shop






LOOM PLAY #21

FQ-2601 FQ-2606


Healthcare




LOOM+ fray-proof lets you freely cut out the tiles in any creative forms.



Education & Libraries

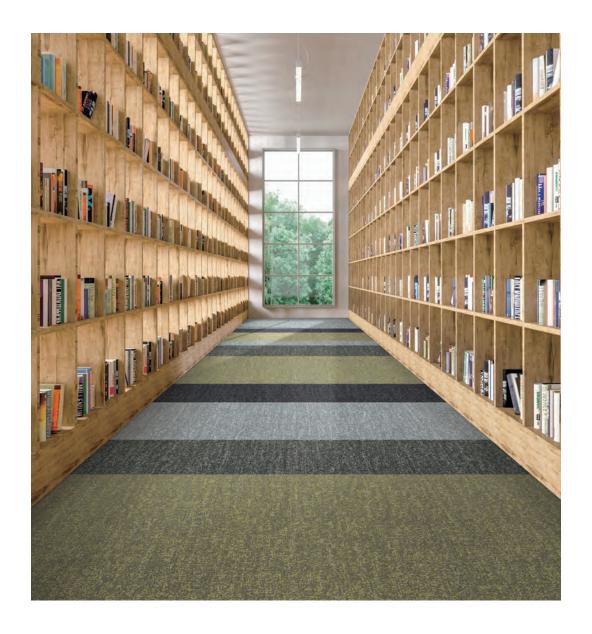




LOOM PLAY #30


16 / 17


Corporate

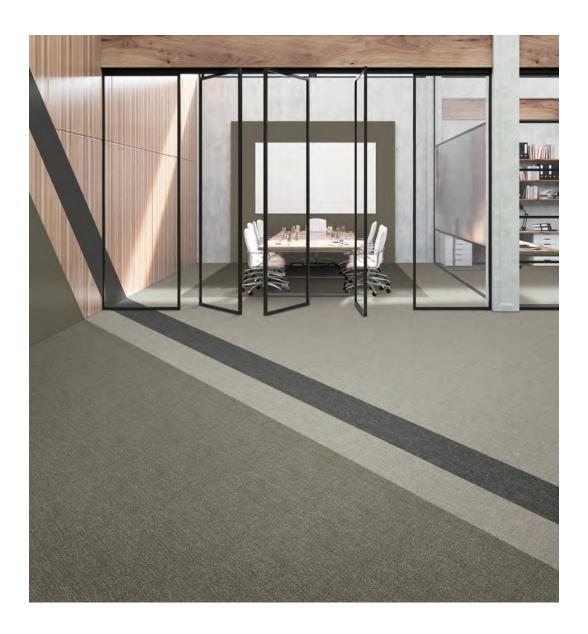



Sports Center

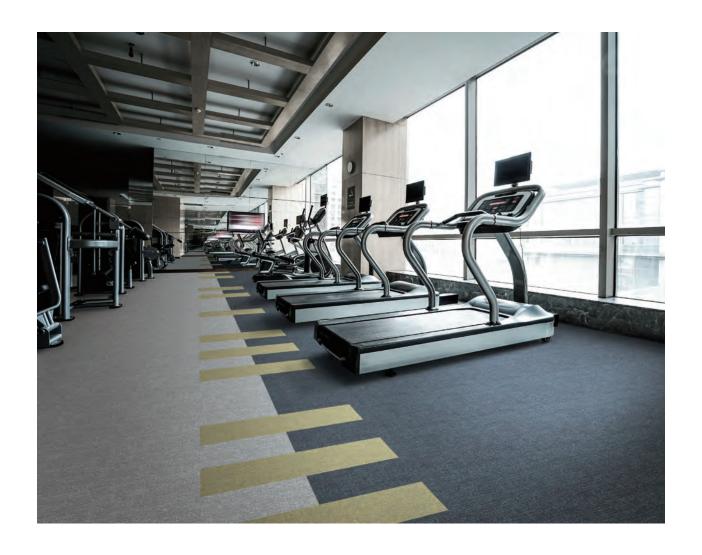



TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m²/Box	Kg/m²
500x500	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	2.5 m²	8.2
250x1000	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	2.5 m²	8.2

2. Test Result

Test Item		Standard	L00M ⁺
Level of use		EN 685	33
Fraying		EN 1814	Frayproof
Thermal resistance		ISO 8302	0.02m ² K/W
Castor chair resistance	3	EN 985	No damage
Dimensional stability	K 7	ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	<u> </u>	EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness	7	ISO 105-B02	≥ 6
Slip resistance	OS DS	DIN 51130 EN 13893	R11 DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness	B	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation	T _B	ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 19° or the normal temperature of the room where the product is to be laid,

for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use.

The site conditions must be maintained during installation and for at least 48 hours after completion.

NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate



















Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Korea Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxglobal.com F-mail_infn@noxglobal.com

NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedang
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Nox Texterior Factory


NOX US | USA

NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830 Office +01-419-701-5060 Fax +01-419-701-5058

NOX ASEAN | VIETNAM

NUX ASEAN
Road NO.8, Nhon Trach 6 lp, Dong Nai, Vietnam
Office +084-251-3684244

POPVibrant & Dazzling

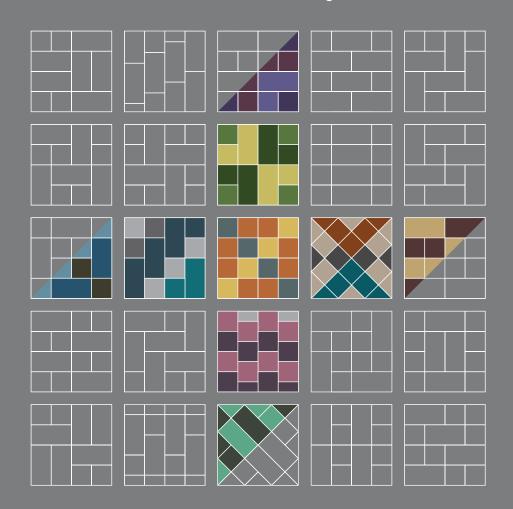






LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound color composition

Realizing multiple tones of color - carefully selected by artists – we provide you with very unique colors that express LOOM+ in harmony with surrounding interiors.



Infinite array of color and textures

Available in myriad colors covering diverse tones like neutral, cool, warm, light and dark tones, we give you unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to various design patterns.



50x50cm 25x100cm

Tile size Plank size



Optimal 2 size variation

With our unique 2 module sizes of 50cm×50cm and 25cmx100cm, the first introduced in woven flooring market, you can elevate flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT[™] Core Structure

NOX EMT[™] Core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years

→ 1. Most Hygienic





- + World's first and only dual protection coating system includes NOX EPT™ Shield, UL-certified to meet ECVP standards for anti-bacterial and anti-microbial performance
- ★ Safe and clean with OEKO-TEX®
- ★ Easy cleaning and maintenance



2. Most Stable & Unique Multi-Layered Structure



- ◆ The most reliable, distinguished NOX EMT™ Core structure for outstanding dimensional stability
- + Consistent product thickness for mix & match across all LOOM+ patterns

3. Tough & Waterproof

⋆ Superior wear resistance and waterproof

function for commercial applications



4. Fray-Proof



★ Clean-cut finishing to prevent fraying even when tiles are cut during installation

REENGUARD Schools



Certified non-toxic, phthalate-free. and fiberglass-free



Quick

Quick and easy loose lay® installation without glue



Easy

Minimal cleaning time and low maintenance




Colorfast

Non-Slip

Slip-resistance

Colorfast properties retain gorgeous original colors over time

with woven fabric surface



Silent & Soft

Soft surface absorbing

POP Vibrant & Dazzling

LOOM+ POP collection proposes a uniquely creative design that spotlights an area while easily blending in with its surroundings. This upbeat pattern scatters parallelograms of differing shades onto a plain jacquard fabric of similar color schemes. The design's bold and energetic image is maximized with a widened, brighter color selection.

Enrich your space with LOOM+ POP, a lively, modern collection that is stylish but nonetheless caters to universal taste.













FQ-2703







FQ-2705

FQ-2706

Each box contains a random set of pieces, which present different parts of the pattern.

08 / 09

Reinvent Spaces with

PLAY!


All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.






25x100cm

NEW LOOM* PLAY!




LOOM PLAY #21




LOOM PLAY #26




LOOM PLAY #22




LOOM PLAY #27



LOOM PLAY #28



LOOM PLAY #24




LOOM PLAY #29



LOOM PLAY #30

INSTALLATION CONCEPT GUIDE

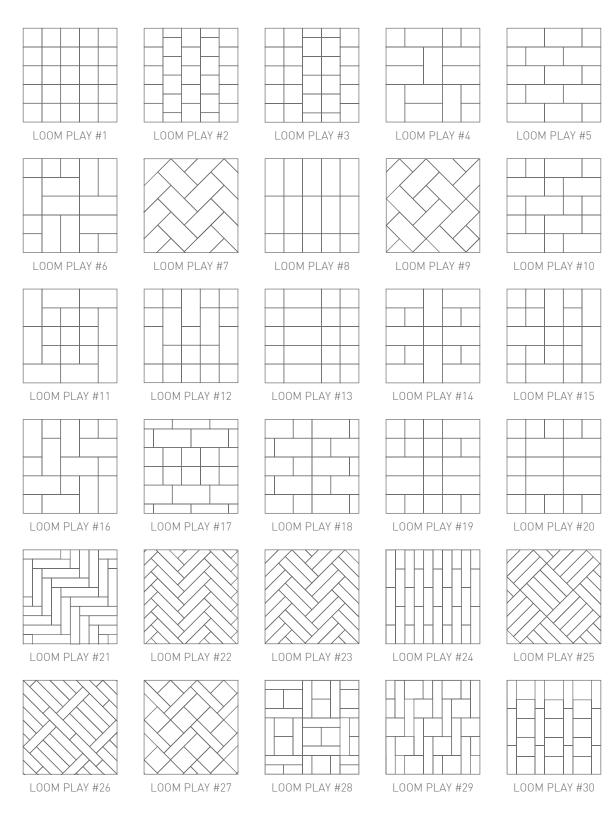



CREATE YOUR OWN DESIGN


LOOM⁺ POP collection can also be installed with plain jacquard fabrics of the same color scheme. Colors not included in the official collection and their respective plain jacquard fabrics are available upon request.

FQ-2702 NT207-8 (plain)

12 / 13

Restaurant






Corporate




LOOM+ POP grey is not included in the official collection, but is available upon request.





FQ-2701 FQ-2702 NT206-6 (grey)

14 / 15

Hospitality Hospitality

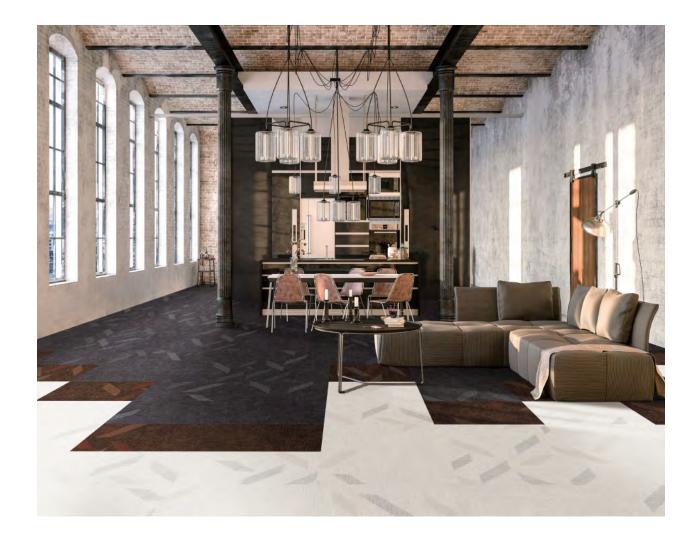

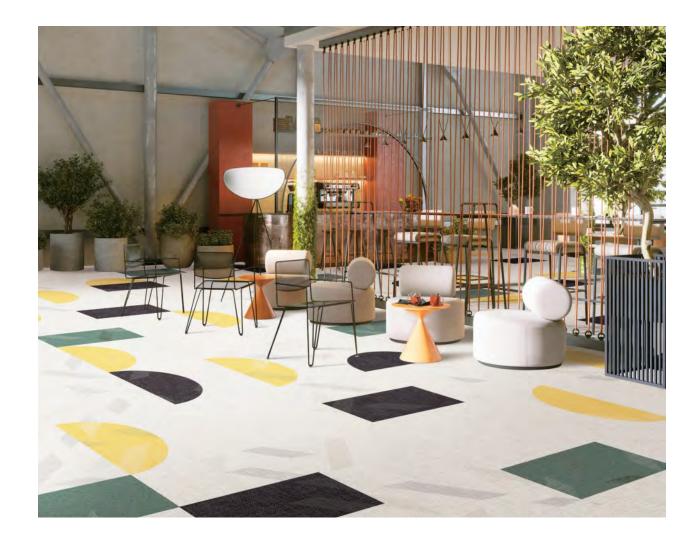




FQ-2701 FQ-2702 FQ-2706


FQ-2701 FQ-2702

FQ-2703 FQ-2704




Education & Libraries







Retail shop





Sports Center

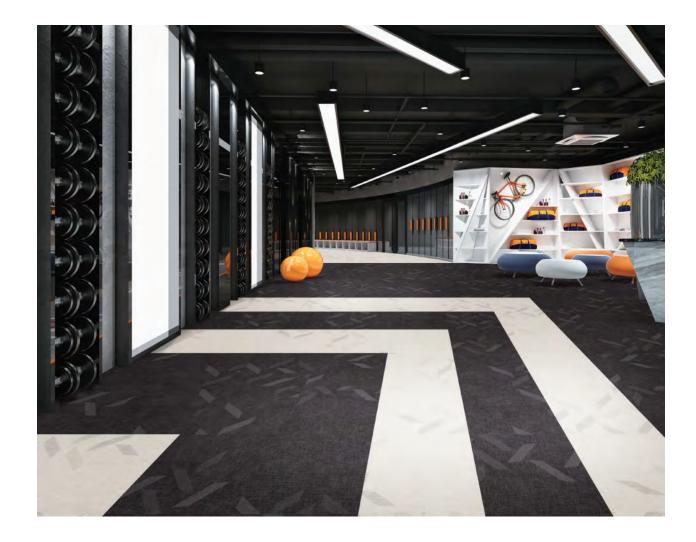



LOOM PLAY #1

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m³/Box	Kg/m²
500x500	3	16 pcs/box	4 m²	5.0
	5	10 pcs/box	2.5 m²	8.2
250x1000	3	16 pcs/box	4m²	5.0
	5	10 pcs/box	2.5m²	8.2

2. Test Result

Test Item		Standard	L00M ⁺
Level of use		EN 685	33
Fraying	%	EN 1814	Frayproof
Thermal resistance		ISO 8302	0.02m²K/W
Castor chair resistance		EN 985	No damage
Dimensional stability	K 7	ISO 23999 EN 986	≤ 0.10% (Norm: ≤ 0.25%) Passed
Fire resistance	B ₁ -51	EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness	7	ISO 105-B02	≥ 6
Slip resistance	PK DS	EN 13893	DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness	7	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate

















Please visit www.noxglobal.com for detailed installation / maintenance guides and technical information.



Designed and Manufactured by NOX Corporation

Design Center & Office

KD Center, 355, Hyoryeong-ro, Seocho-gu, Seoul, 06643 Kores Tel +82-2-520-7600 Fax +82-2-598-9674 www.noxglobal.com F-mail_info@noxglobal.com

NOX Corp. | KOREA

Shinho Factory
Shinho 2nd Factory, Yedang
Enbo Factory
Godeok Factory
Bongsan Factory
Deoksan Factory
Nox Texterior Factory

NOX US | USA

NOX US P.O. Box 824 931 S. Springville Avenue Fostoria, OH 44830 Office +01-419-701-5060 Fax +01-419-701-5058

NOX ASEAN | VIETNAM

NOX ASEAN Road NO.8, Nhon Trach 6 lp, Dong Nai, Vietnam Office +084-251-3684244