


Dot Com 2.0

Data Flow / QR Code



Milliken®

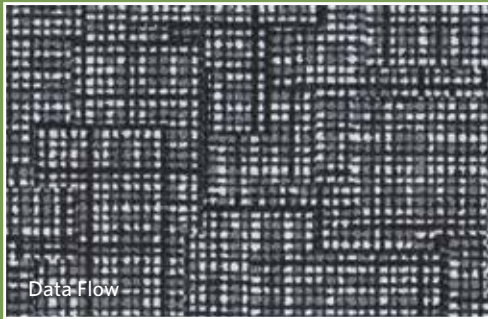

With the click of a mouse, the world opens in front of you. The world of the web enables us to communicate and interact in a way we have never imagined. Staying on par with current technology, the Dot Com collection illustrates the interconnectedness of the virtual world.

Dot to Dot – Line to Line – Code your space and let it seamlessly flow.



Data Flow in Matrix, monolithic installation
4



QR Code in Matrix, monolithic installation



Data Flow in Byte, monolithic installation



Data Flow in Python, monolithic installation






Data Flow in Syntax and Matrix, monolithic installation
10



Data Flow and QR Code in Diagram, monolithic installation



QR Code in Decode and XML, monolithic installation

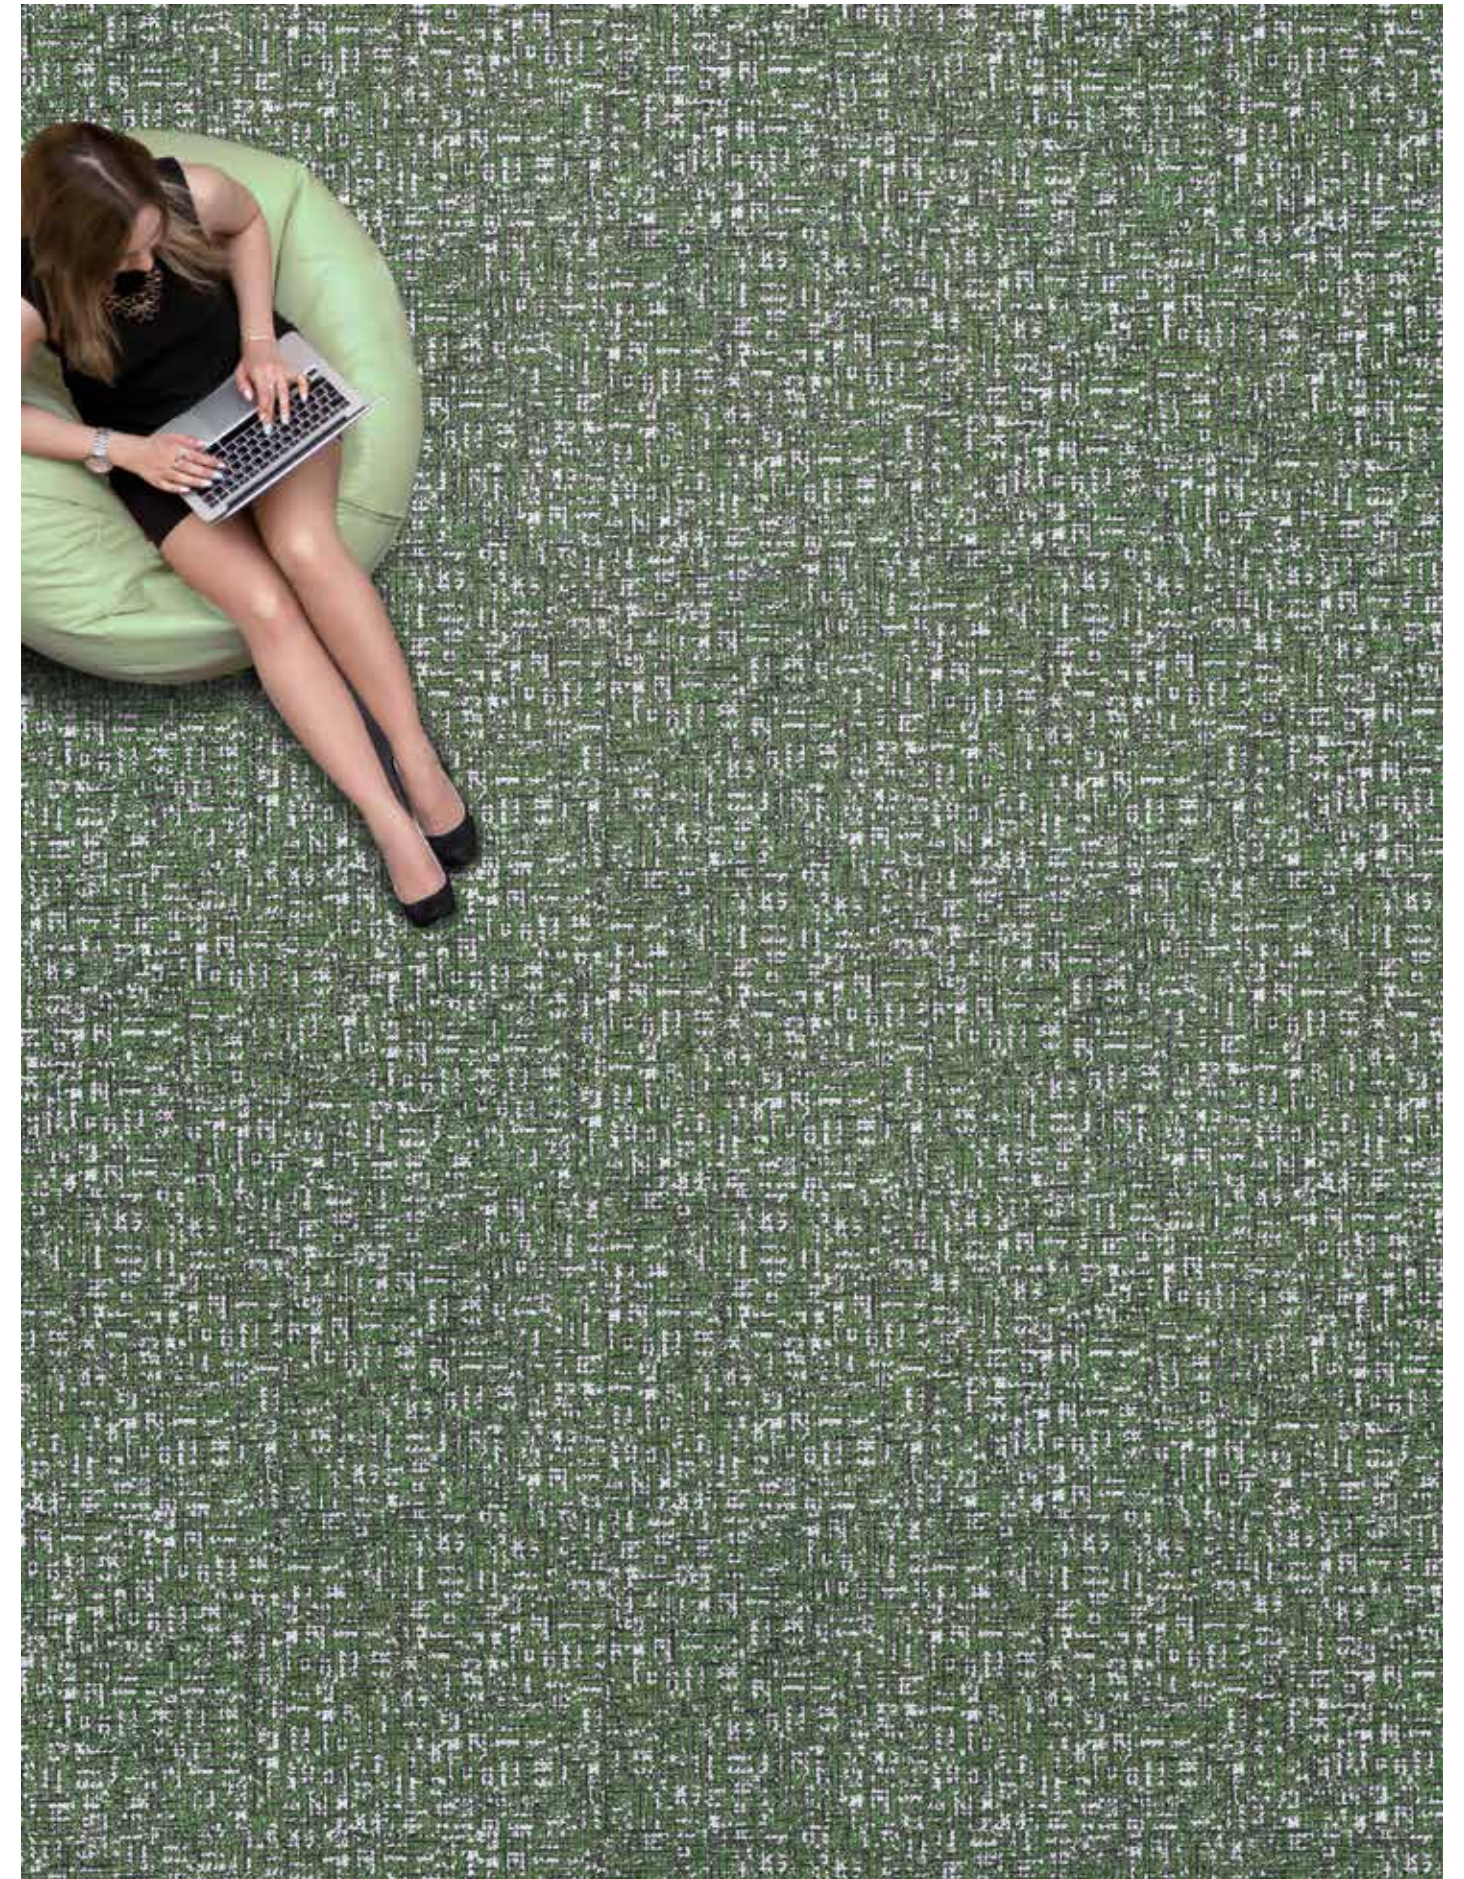

QR Code in Java, monolithic installation

COLORLINE


Data Flow



DAT48-6 DIAGRAM




DAT218-5 BYTE



DAT218-254 ROUTE



DAT218-13 BINARY



DAT131-154 DECODE



DAT154-119 MATRIX




DAT153-118 DIGIT




DAT254-178 DATABASE



DAT154-107 BITCOIN



DAT190-118 SYNTAX



DAT104-153 XML



DAT203-118 JAVA



DAT231-154 PYTHON

QR Code



QRC6-48 DIAGRAM



QRC5-218 BYTE



QRC13-218 BINARY



QRC154-131 DECODE



QRC119-154 MATRIX



QRC178-254 DATABASE




QRC107-154 BITCOIN



QRC254-218 ROUTE



QRC118-153 DIGIT



QRC118-190 SYNTAX



QRC153-104 XML



QRC118-203 JAVA



QRC154-231 PYTHON

DOT COM 2.0

Data Flow / QR Code

SPECIFICATION

Construction - Tufted, Textured Loop

Tile Size - 50cm X 50cm (19.7 X 19.7In.)
1m X 1m (39.4 X 39.4 In.)

Face Fiber - 100% Milliken Certified Nylon

Dye Method - Millitron®

Standard Backing - PVC-Free WellBAC™ Comfort
Available with TractionBack®

Nominal Total Thickness - 8.5 mm AVG.

PERFORMANCE

Stain Repel/Stain Resist/Soil Release - StainSmart®

Flammability - ≥ 0.45 (Class I)

Texture Appearance Retention Rating (TARR) - Severe

Indoor Air Quality - CRI Green Label Plus™ - GLP3237, Carpet Category 5Y

技术指标

结构 - 簇绒织造圈绒结构

产品尺寸 - 50 厘米 X 50 厘米 (19.7 X 19.7 英寸)
1 米 X 1 米 (39.4 X 39.4 英寸)

表层纤维 - 100% 美利肯认证尼龙

染色技术 - Millitron® 电脑数码针染

标准底垫 - 不含 PVC 之 WellBAC™ Comfort 舒适软底
可选装 TractionBack® 免胶

额定总厚度 - 8.5 毫米 平均

产品性能

抗污 / 防污 / 去污 - StainSmart®

阻燃性 - ≥ 0.45 (一级)

外观保持等级 (TARR) - 重度商业使用

室内空气质量 CRI Green Label Plus™ - GLP3237, 地毯类别 5Y

Installation Method 安装方式:



Monolithic
同一方向安装

TractionBack®

Simplify your modular installation with Milliken's patented TractionBack®, an innovative backing system that is faster, more cost efficient, and environmentally superior to wet adhesives and peel-and-stick carpet tile.



Declare.

Milliken

China
North & North West &
South West Of China
T +86 10 6465 1206
T +86 133 0101 8460
South of China &
HK & Macau
T +86 181 1743 0032
East & Central of China
T +86 21 6145 1758

India
Bangalore
T +91 98408 98963
Delhi
T +91 95010 11800
Hyderabad
T +91 99631 64059
Mumbai
T +91 98926 00362

Rest of Asia
Manila
T +63 915 816 7127
Seoul
T +82 2 3783 0747
Singapore
T +65 6593 1301
Tokyo
T +81 3 5203 8406
Jakarta
T +6221 2960 7222



www.millikencarpet.com

2710030022
Issued Jan 2020